

Dimmer Dot - Variable AC Voltage Auto Transformer

Single Phase - (OB) Open Back / Panel Mount - Air Cooled - Manual





SPECIFICATIONS

Single Phase (OB) Open Back / Panel Mount								
Input: 230 / 240 volts 50Hz								
Output: 0 - 260 / 270 volts								
Type	Nominal Amps	Cont. Amps	H	W	L	M	D	Wt
ARD-11-OB	1	1	100	98	84	28	4	1.6
D-21-OB	2	1.9	132	127	117	92	6.5	3.3
D-41-OB	4	3.9	155	190	175	146	10.2	6.0
D-81-OB	8	7	175	200	175	146	10.2	8.5
D-101-OB	10	9	175	210	192	154	10.2	10
D-151-OB	15	12	190	240	220	176	10.2	14
D-201-OB	20	17	215	290	250	204	14	19
D-281-OB	28	23	215	345	295	238	14	25

All dimensions (mm) & weights (Kg) are approx. only


ARD-11-OB

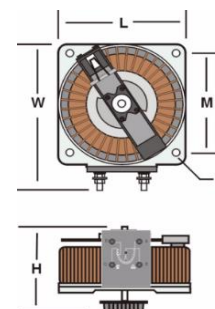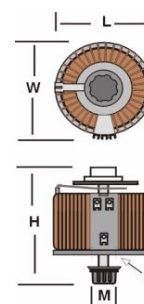

Dimmer Dot - Variable AC Voltage Auto Transformer

Single Phase - (OB) Open Back / Panel Mount - Air Cooled - Manual

CIRCUIT DIAGRAM

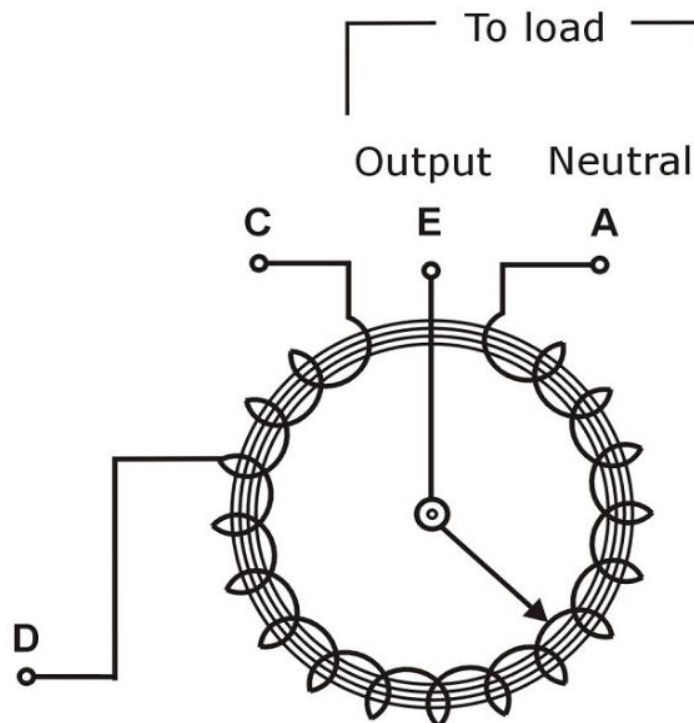

230 / 240 Volt AC 50Hz Line Input to **C** for 'Line voltage' Output
230 / 240 Volt AC 50Hz Line Input to **D** for 'Over voltage' Output