


Dimmer Dot - Variable AC Voltage Auto Transformer

Three Phase - (OB) Open Back / Panel Mount - Air Cooled - Manual



SPECIFICATIONS


Three Phase Open Back / Panel Mount								
Input: 400 / 415 volts 50 Hz								
Output: 0 - 450 / 470 volts								
Type	Nom Amps	Cont. Amps	H	W	L	M	D	Wt
D- 23-OB	2	1.9	400	127	117	92	6	11
D- 43-OB	4	3.9	480	190	175	146	10	20
D- 83-OB	8	7	520	190	175	146	10	27
D-103-OB	10	9	520	210	192	154	10	32
D-153-OB	15	12	535	240	220	176	10	44
D-203-OB	20	17	675	290	250	204	12	58
D-283-OB	28	23	690	345	300	238	12	80
All dimensions (mm) & weights (Kg) are approx. only								

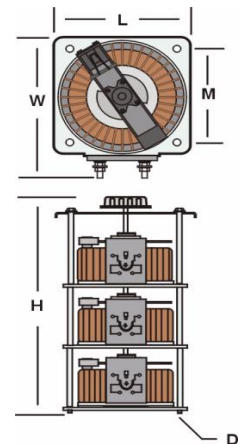

Dimmer Dot - Variable AC Voltage Auto Transformer

Three Phase - (OB) Open Back / Panel Mount - Air Cooled - Manual

CIRCUIT DIAGRAM

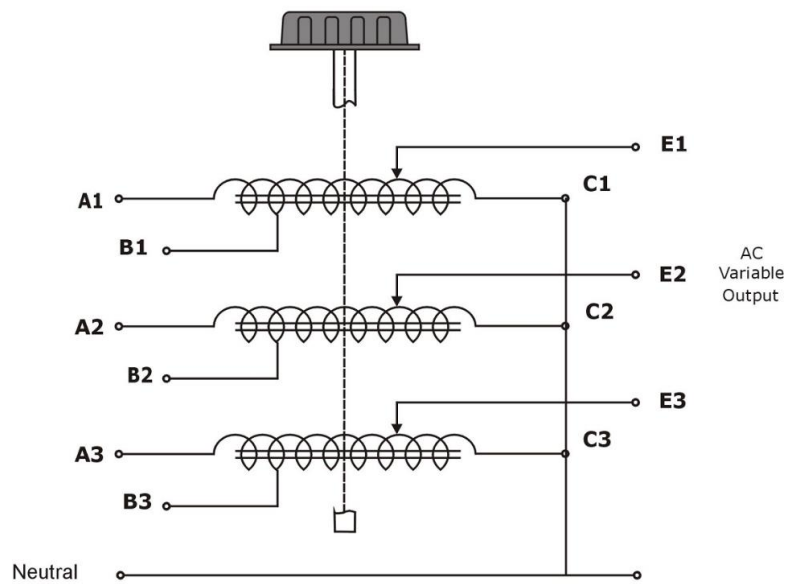

400 / 415 Volt AC 50Hz Line Input to **A1, A2, A3** for 'Line voltage' Output
 400 / 415 Volt AC 50Hz Line Input to **B1, B2, B3** for 'Over voltage' Output